



IP66

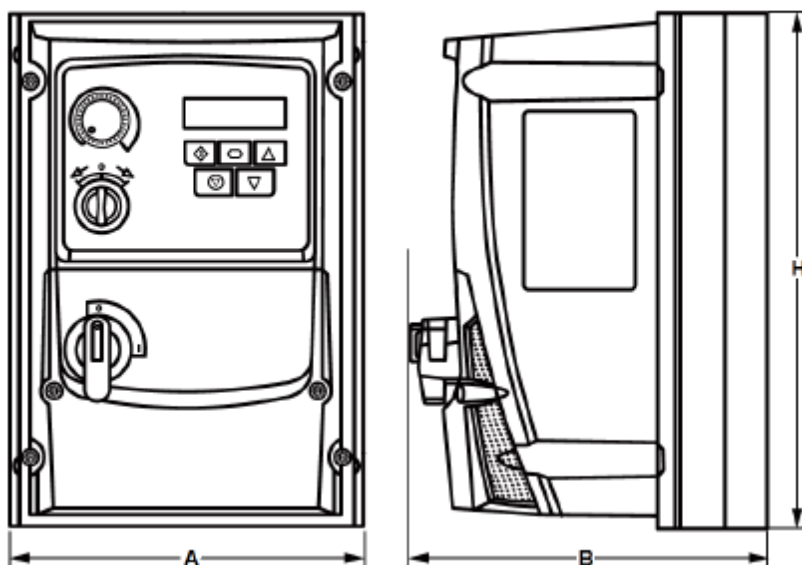

MODELS	KW	V/ph IN	V/ph OUT	IP	Amp.	A mm	B mm	H mm	Kg
INV66M/T0,4	0,37	230/1	230/3	66	2,3	161	162	232	2,5
INV66M/T0,75	0,75	230/1	230/3	66	4,3	161	162	232	2,5
INV66M/T1,5	1,5	230/1	230/3	66	7	161	162	232	2,5
INV66M/T2,2	2,2	230/1	230/3	66	10,5	188	182	257	3,5
INV66T/T0,75	0,75	400/3	400/3	66	2,2	161	162	232	2,5
INV66T/T1,5	1,5	400/3	400/3	66	4,1	161	162	232	2,5
INV66T/T2,2	2,2	400/3	400/3	66	5,8	188	182	257	3,5
INV66T/T4	4	400/3	400/3	66	9,5	188	182	257	3,5
INV66T/T5,5	5,5	400/3	400/3	66	14	211	238	310	7,0
INV66T/T7,5	7,5	400/3	400/3	66	18	211	238	310	7,0

DISEGNATO		CODICE:	
DATA	14/05/2024		
PESO			
		CONFIGURAZIONE:	
			A4
			FOGLIO 1 DI 1