



IP66

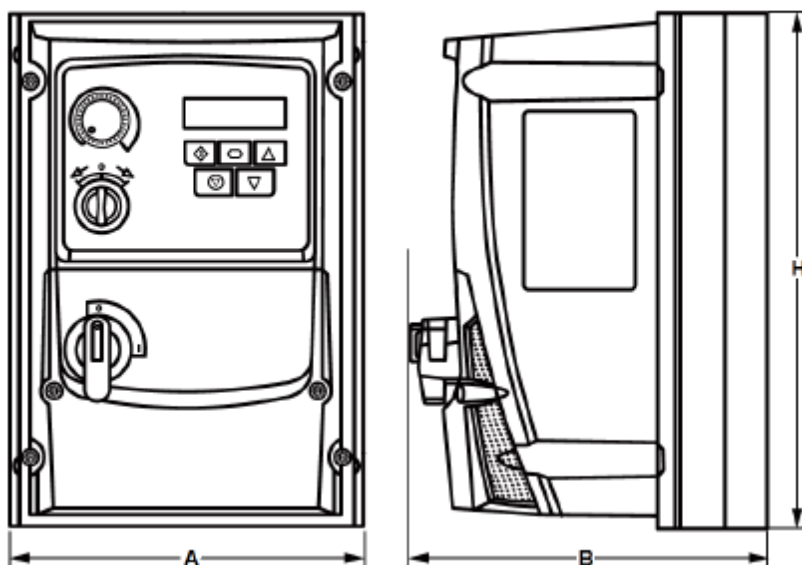

| MODELS       | KW   | V/ph<br>IN | V/ph<br>OUT | IP | Amp. | A<br>mm | B<br>mm | H<br>mm | Kg  |
|--------------|------|------------|-------------|----|------|---------|---------|---------|-----|
| INV66M/T0,4  | 0,37 | 230/1      | 230/3       | 66 | 2,3  | 161     | 162     | 232     | 2,5 |
| INV66M/T0,75 | 0,75 | 230/1      | 230/3       | 66 | 4,3  | 161     | 162     | 232     | 2,5 |
| INV66M/T1,5  | 1,5  | 230/1      | 230/3       | 66 | 7    | 161     | 162     | 232     | 2,5 |
| INV66M/T2,2  | 2,2  | 230/1      | 230/3       | 66 | 10,5 | 188     | 182     | 257     | 3,5 |
| INV66T/T0,75 | 0,75 | 400/3      | 400/3       | 66 | 2,2  | 161     | 162     | 232     | 2,5 |
| INV66T/T1,5  | 1,5  | 400/3      | 400/3       | 66 | 4,1  | 161     | 162     | 232     | 2,5 |
| INV66T/T2,2  | 2,2  | 400/3      | 400/3       | 66 | 5,8  | 188     | 182     | 257     | 3,5 |
| INV66T/T4    | 4    | 400/3      | 400/3       | 66 | 9,5  | 188     | 182     | 257     | 3,5 |
| INV66T/T5,5  | 5,5  | 400/3      | 400/3       | 66 | 14   | 211     | 238     | 310     | 7,0 |
| INV66T/T7,5  | 7,5  | 400/3      | 400/3       | 66 | 18   | 211     | 238     | 310     | 7,0 |

|  |            |                 |               |
|--|------------|-----------------|---------------|
| DISEGNATO  |            | CODICE:         |               |
| DATA   | 14/05/2024 |                 |               |
| PESO   |            |                 |               |
|  |            | CONFIGURAZIONE: |               |
|  |            |                 | A4            |
|  |            |                 | FOGLIO 1 DI 1 |